

A Uniquely Superior Water Treatment System



The Kenai EcoPro+ is a uniquely superior point-of-entry water softener filter system that provides the entire home with cleaner, softer, healthier and more efficient water. It is a multimedia system that reduces unpleasant contaminants, calcium, magnesium, and iron. The EcoPro+ greatly increases the efficiency of water making cleaning vastly improved, reducing the need for cleaning soaps, detergents and cleaning chemicals. Catalytic carbon improves color, taste and odor for better tasting food and beverages and disposes of suspended solids and sediment down the drain and out of your home.



CPK-ECOPRO+

- Intelligent digital microprocessor controls system operations
- Catalytic carbon reduces chlorine and chloramine
- Durable corrosion-resistant construction.
- Built-in diagnostics insures consistent, superior quality water
- Jacketed and weather-protected (when weather cover is added)
- Sold and serviced by certified professionals







Start enjoying the Kenai EcoPro+ difference today.

Contact a Kenai authorized dealer to install a EcoPro+ Professional Series Water Treatment System and start enjoying all the benefits of this whole home powerhouse.

Why do I need soft water?

Hard water is hard on you, your home and your wallet.




- Reduced effectiveness of soaps and detergents causing scratchy towels, spots on glassware, & unwanted soap residue
- · Unsightly stains and residue
- Mineral buildup inside your water heater and other water-using home appliances

The EcoPro+ Difference

This advanced softening system has features which position it in a class all its own.

- · Professional grade 1" control valve
- · Intelligent programmable digital interface
- · Flexible option for high efficiency or high capacity
- · Integrated bypass with easy operation
- · Metering system learns water usage patterns
- · Engineered for municipal (city) water applications.
- · For private well applications, use the Kenai EcoPro.

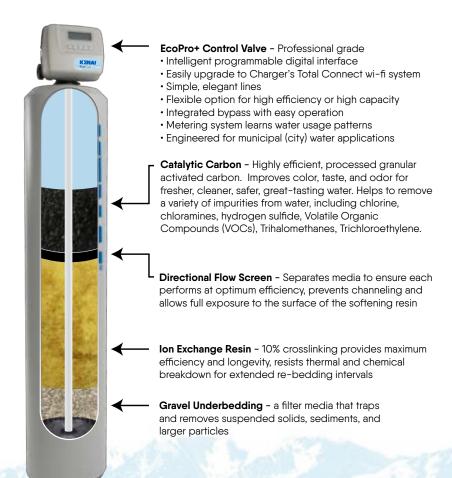



SPECIFICATIONS

Plumbing Connections 3/4", 1", or 1.25" NPT 3/4", 1", 1.25", or 1.5" PVC Glue 3/4", 1", 1.25", or 1.5" Sweat 3/4" or 1" Sharkbite 3/4" or 1" John Guest

Drain Connection 3/4" NPT

Brine Connection 3/8" QC

Service Flow Rates 12.7 gpm (ANSI/NSF Std 44 Equivalent)

Backwash/Rinse Flow 4.2 gpm

Operating Pressure 20 – 125 psi

Operating Water Temps Min 40° F - Max 110° F

Electrical Supply 120 VAC 50/60 Hz

BRINE TANK SPECIFICATIONS

Liquid Capacity 30 gallons

Salt Capacity 270 lbs

Weight 13 lbs

Tank Size 15 x 15 x 40



The EcoPro+ and EcoPro+T are also available with the Autotrol valve. Ask us for details

